



Revox Invisible Subwoofer (INV SUB)

TECHNICAL DATASHEET

REVOX
Studio Sound Quality

INV SUB MK II

High-performance subwoofer with special polymer cone invisibly installed under plaster, paint or wallpaper. Wide dispersion characteristics. Specially designed for invisible integration in drywall, solid construction, walls and ceilings. Very shallow installation depth. Impressive bass reproduction at high sound pressure levels. Simple installation and low-vibration housing design.

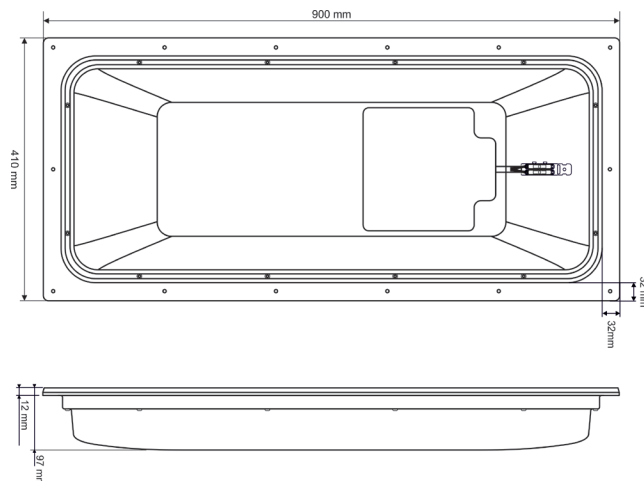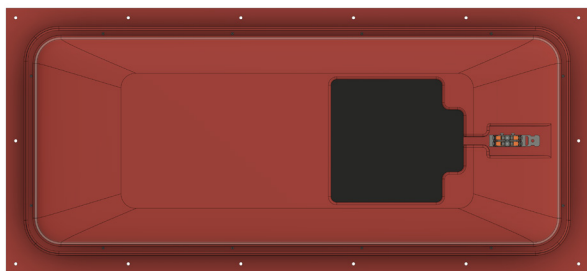

TECHNICAL DATA

	INV SUB MK II
Order Number	108469650
Dimensions L x W x D (mm)	900 x 410 x 97
Min. installation depth (mm)	97
Weight (kg)	10,0
Capacity (Watt)	max. 120 W RMS
Impedance (ohm)	4
Sensitivity	87 dB/1W/1m
Frequency range	50 Hz - 200 Hz
Suitable for damp rooms	✓

EQUIPMENT

	INV SUB MK II
Installation frame available	✓
Sprue housing available	✓
1K PU special adhesive	✓

Note: Coatings influence the efficiency. The installation instructions are to be taken into account for standard installations. Special fixtures after consultation with the sales consultant.