


Revox Invisible Speaker

TECHNICAL DATA SHEET

REVOX
Studio Sound Quality

INV UNIT MK II

Panel loudspeakers installed invisibly under plaster, paint or wallpaper. Flat radiation characteristics. Full-range speaker with special polymer membrane equipped with high-performance subwoofer and exciter. Especially for invisible integration in drywall, solid construction, walls and ceilings. Can also be used behind wood with pocket milling.

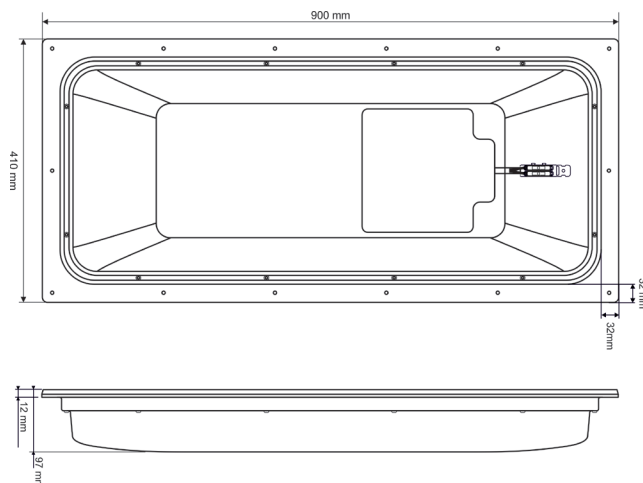

TECHNICAL DATA

	INV UNIT MK II
Order Number	108469640
Dimensions L x W x D (mm)	900 x 410 x 97
Min. installation depth (mm)	97
Weight (kg)	10,3
Capacity (Watt)	max. 150 W RMS
Impedance (Ohm)	4
Sensitivity	82 dB/1W/1m
Frequency range	53 Hz - 27 kHz
Suitable for damp rooms	✓

EQUIPMENT

	INV UNIT MK II
Installation frame available	✓
Sprue housing available	✓
1K PU special adhesive	✓

Note: Coatings influence the efficiency. The installation instructions are to be taken into account for standard installations. Special fixtures after consultation with the sales consultant.