

Revox Invisible Speaker (INV)


TECHNICAL DATA SHEET

REVOX
Studio Sound Quality

INV 20 slim

INV 20 slim carbon

Particularly narrow panel loudspeakers for invisible integration in dry construction, solid construction, walls and ceilings. Flat radiation characteristics. The loudspeaker is particularly powerful thanks to the special polymer membrane. Due to the particularly low installation depth of only 26 mm, the Invisible Speaker fits into almost any wall / ceiling. Optimal even when space is very limited. Carbon version: Thanks to the special carbon membrane, the loudspeaker is particularly suitable for outdoor use and also under special temperature conditions (-20 degrees / + 80 degrees Celsius) and temperature fluctuations.

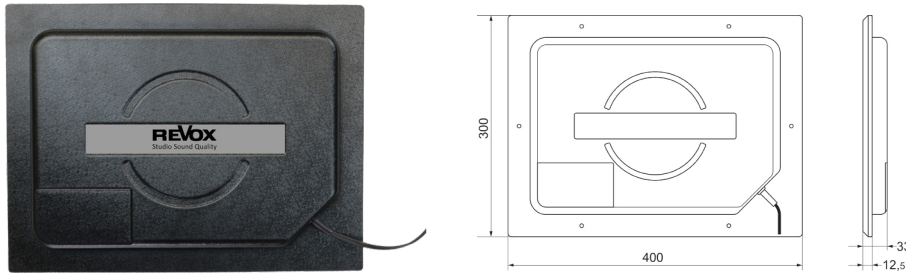

TECHNISCHE DATEN

	INV 20 slim	INV 20 slim carbon
Order Number	1.084.669.00	1.084.662.00
Dimensions L x W x D (mm)	400 x 300 x 33	400 x 300 x 33
Min. installation depth (mm)	26	26
Weight (kg)	0,9	0,85
Capacity (Watt)	20	20
Impedance (Ohm)	8	8
Sensitivity	85 dB/1W/1m	87 dB/1W/1m
Frequency range	120 Hz - 23 kHz	120 Hz - 23 kHz
Suitable for outdoors	X	✓

EQUIPMENT

	INV 20 slim	INV 20 slim carbon
Installation frame available	✓	✓
Sprue housing available	X	X
Installation bracket for plasterboard surface	✓	✓
1K PU special adhesive	✓	✓
Passive protection circuit	✓	✓

Note: Coatings affect the efficiency. The Invisible Speakers must be equipped with an analogue (passive protective circuit) or DSP-based high-pass filter 24dB / 120 Hz in the signal path prior to commissioning. The installation instructions are to be taken into account for standard installations. Special fixtures after consultation with support.