

Revox Invisible Speaker (INV)


TECHNICAL DATA SHEET

REVOX
Studio Sound Quality

INV 20 mini

INV 20 mini carbon

Compact-size surface loudspeakers installed invisibly under plaster, paint or wallpaper. Flat radiation characteristics. With special polymer membrane for integration in dry construction, solid construction, walls and ceilings as well as in specific applications. Due to the very small dimensions, the Invisible Speaker fits even with limited specifications. Carbon version: Thanks to the special carbon membrane, the loudspeaker is particularly suitable for outdoor use and also under special temperature conditions (-20 degrees / + 80 degrees Celsius) and temperature fluctuations.

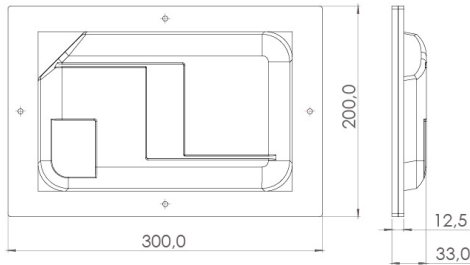

TECHNICAL DATA

	INV 20 mini	INV 20 mini carbon
Order Number	1.084.660.00	1.084.661.00
Dimensions L x W x D (mm)	300 x 200 x 33	300 x 200 x 33
Min. installation depth (mm)	26	26
Weight (kg)	0,6	0,58
Capacity (Watt)	20	20
Impedance (Ohm)	8	8
Sensitivity	81 dB/1W/1m	81 dB/1W/1m
Frequency range	120 Hz - 20 kHz	120 Hz - 20 kHz
Suitable for outdoors	X	✓

ACCESSORIES

	INV 20 mini	INV 20 mini carbon
Installation frame available	✓	✓
Sprue housing available	X	X
1K PU special adhesive	✓	✓
Passive protection circuit	✓	✓

Note: Coatings affect the efficiency. The Invisible Speakers must be equipped with an analogue (passive protective circuit) or DSP-based high-pass filter 24dB / 120 Hz in the signal path prior to commissioning. The installation instructions are to be taken into account for standard installations. Special fixtures after consultation with support.