


# Revox Invisible Speaker (INV)

## TECHNICAL DATA SHEET

### INV 20 mini

### INV 20 mini carbon

Surface loudspeakers installed invisibly under plaster, paint or wallpaper. Flat radiation characteristics. With special polymer membrane for integration in dry construction, solid construction, walls and ceilings as well as in wood and wood-based panels, furniture and kitchen cupboards.

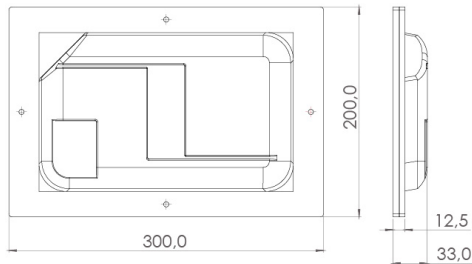

## TECHNICAL DATA

	INV 20 mini	INV 20 mini carbon
Order Number	1.084.660.00	1.084.661.00
Dimensions L x W x D (mm)	300 x 200 x 33	300 x 200 x 33
Min. installation depth (mm)	26	26
Weight (kg)	0,6	0,58
Capacity (Watt)	20	20
Impedance (Ohm)	8	8
Sensitivity	81 dB/1W/1m	81 dB/1W/1m
Frequency range	120 Hz - 20 kHz	120 Hz - 20 kHz
Suitable for outdoors	X	✓

## ACCESSORIES

	INV 20 mini	INV 20 mini carbon
Installation frame available	✓	✓
Sprue housing available	X	X
1K PU special adhesive	✓	✓
Passive protection circuit	✓	✓

Note: Coatings affect the efficiency. The Invisible Speakers must be equipped with an analogue (passive protective circuit) or DSP-based high-pass filter 24dB / 120 Hz in the signal path prior to commissioning. The installation instructions are to be taken into account for standard installations. Special fixtures after consultation with support.