


# Revox Invisible Subwoofer (INV SUB)

## TECHNICAL DATA SHEET

### INV SUB

High-performance subwoofer with a special polymer membrane installed invisibly under plaster, paint or wallpaper. Flat radiation characteristics. Especially for invisible integration in drywall, solid construction, walls and ceilings. Very low installation depth. Impressive bass reproduction with high sound pressure. Easy installation and low-vibration housing construction.

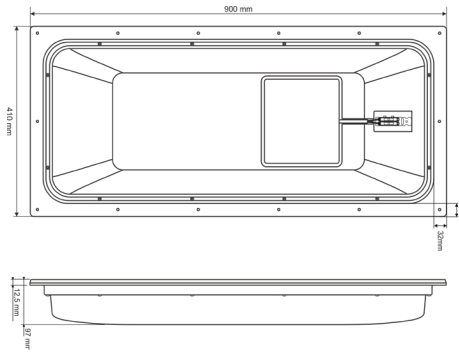

### TECHNICAL DATA

	INV SUB
Order Number	1.084.696.20
Dimensions L x W x D (mm)	900 x 410 x 97
Min. installation depth (mm)	90
Weight (kg)	7,8
Capacity (Watt)	max. 100 W RMS
Impedance (Ohm)	4
Sensitivity	80 dB/1W/1m
Frequency range	50 Hz - 140 Hz
Suitable for outdoors	X

### EQUIPMENT

	INV SUB
Installation frame available	✓
Sprue housing available	X
1K PU special adhesive	✓

Note: Coatings influence the efficiency. The installation instructions are to be taken into account for standard installations. Special fixtures after consultation with the sales consultant.