

Revox speakers True studio sound quality


Revox Inceiling I82 stereo



In spite of the compact dimensions, the Revox Inceiling I82 stereo speaker delivers an amazing sound. The low mid-range driver provides sound with power and clarity in the low frequency range so that in most cases, additional bass speakers are unnecessary. The result is a brilliant, space-filling sound without any visible technology imposing itself on the room. With the Revox Inceiling I82 stereo speaker, a high quality stereo sound is possible with just one speaker when space is at a premium. Simple and problem-free installation is guaranteed thanks to the low-profile build-in depth.



Revox Inceiling I82 stereo without grill

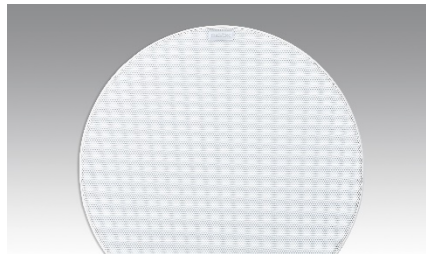


Revox Inceiling I82 stereo



Revox Inceiling I82 stereo

Technical data:

Revox Inceiling I82 stereo

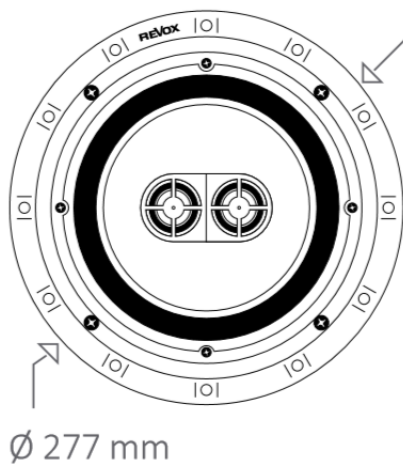

Double 2 way speaker system

Outer diameter	277 mm
Cutout diameter	238 mm
Installation depth	95 mm
Weight	2,3 kg
Power rating	2 x 40 Watt
Music power handling capacity	2 x 60 Watt
Impedance	2 x 6 Ohm
Frequency response	32 Hz – 20 kHz* / 48 Hz – 20 kHz**
Efficiency (2.83 V/1 m)	97 dB
Woofer / Midrange	205 mm polypropylene (double voice coil)
Tweeter	2 x 25 mm aluminium dome

*within ceiling / **with Revox cabinet