

Revox

True studio sound quality

Revox M51



The modular construction of the Revox M51 enables you to create your own individual Revox World ranging from a standalone audio/video centre right up to a comprehensive Multiroom solution for the whole house.

The M51 already contains the modules for DVD, decoder and amplifier. Further modules and functions up to the integration into the Revox Multiuser System can easily be added by plug and play.

You will find the fundamental idea of modularity has been consistently followed in the two different M51 output options. It is possible to equip your system with an analogue 5 x 60 watt output or the more powerful 5 x 200 watt PWM (Pulse Width Modulation) output for particularly large rooms.



Revox M51 detail




Revox M51 display



Revox M51 module slots

Technical data:

Revox M51

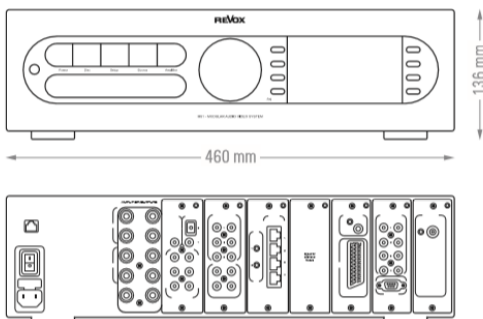

W 460 mm / D 400 mm / H 136 mm (without cable) / weight from 20,5 kg

AC supply voltage	230 V resp. 115 V	
Fuse rating	4 A resp. 8 A, slow-blow	
Power consumption	Max. 500 Watt	
Operation	Typical 70 Watt	
Standby	2 Watt	
Output power	5 x 60 Watt RMS*	5 x 200 Watt Music**
Frequency response	20 Hz – 150 kHz / -3dB*	3 Hz – 60 kHz**
Suppression factor	>100 at 8 Ohm*	200**
Harmonic distortion	0,003 % at 20 Watt*	0,003 % at 50 Watt**
Headphone output	Max. 1 V at 32 Ohm*	Max. 1 V at 32 Ohm**

*analogue amplifier

**pwm amplifier