

# Revox


## True studio sound quality

### Revox Joy Audio Server

The path to the perfect audio library has never been as easy to take as it is with the Revox Joy Audio Server. The server starts as soon as it's turned on and features enough space for up to 1,500 albums in CD quality or 2,300 albums in FLAC compression. Owners who have even larger collections can seamlessly expand the storage space using the network or an external product.

An intuitive GUI guides you through the clearly arranged music database and the configuration of the audio server.

Thanks to identical casing dimensions with the Revox Joy network receivers S119 and S120 and a real glass front, the Audio Server S37 fits perfectly into the Joy family.

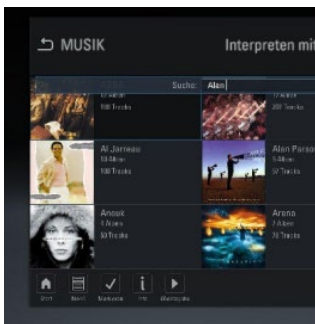

GUI



Revox Joy Audio Server white





Revox Joy Audio Server detail



Revox Joy Audio Server detail

### Technical data:

#### Revox Joy Audio Server

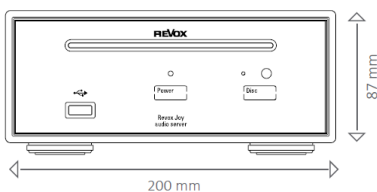

Dimensions	H 87 mm x W 200 mm x D 322 mm (A further 50–60 mm have to be calculated in for cable and plugs)
Weight	3,4 kg
Power supply	External power supply 12 V; 5,5 A
Power consumption	typical 15 Watt, max 40 Watt
Standby	< 1 Watt

#### Data Audio Video

Audio output	Optical to 192 kHz 24 bit, HDMI to 96 kHz 24 bit, analogue
Video output	HDMI 1920 x 1080, VGA
Audio formats	AAC, AC, DTS, DTS HD, EAC3, FLAC, LPCM, MAC, MP1, MP2, MP3, Vorbis, WMA lossless